

1/27

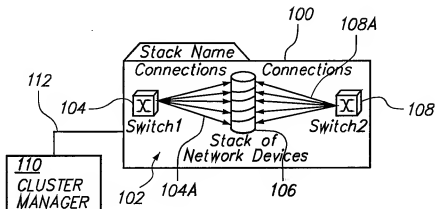


FIG. 1A

FIG. 1B

2/27

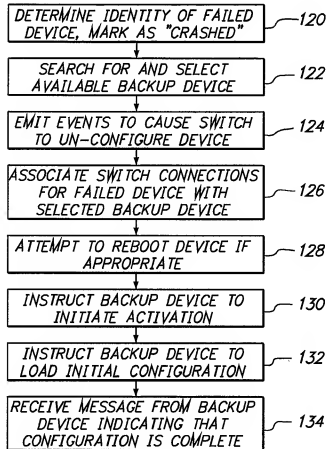
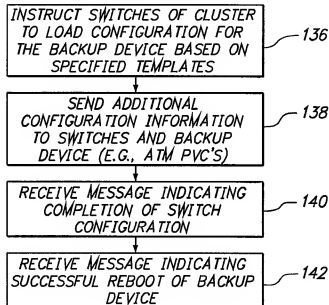


FIG. 1C



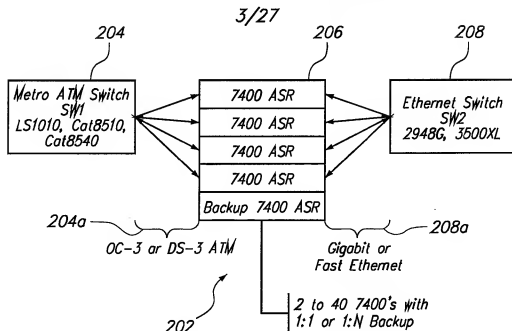


FIG. 2


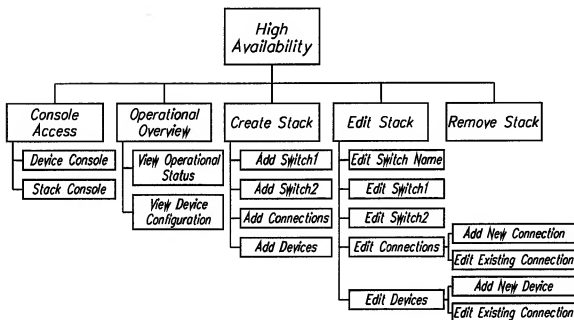


FIG. 3


4/27

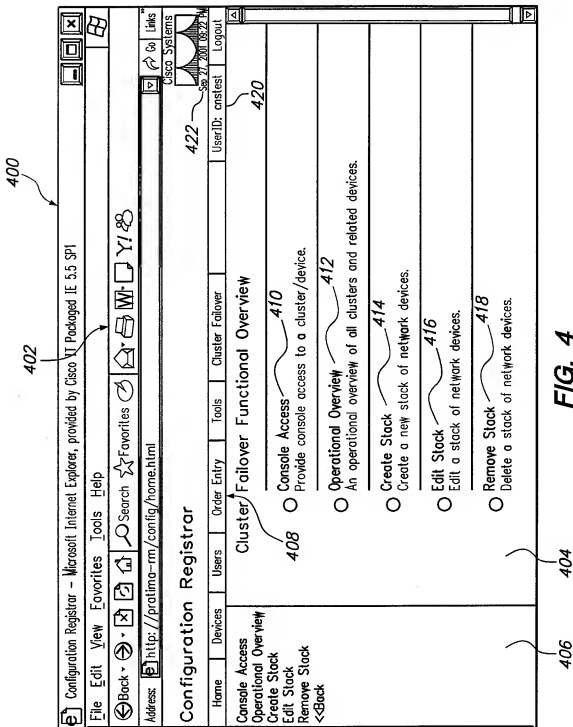

5/27

FIG. 5

6/27

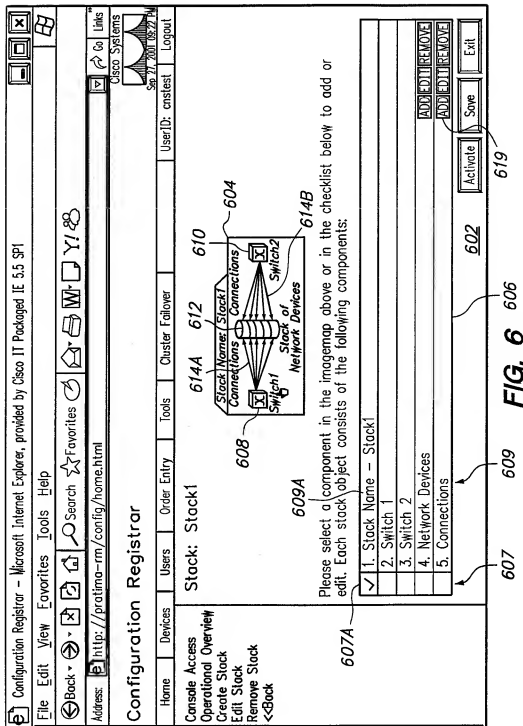

7/27

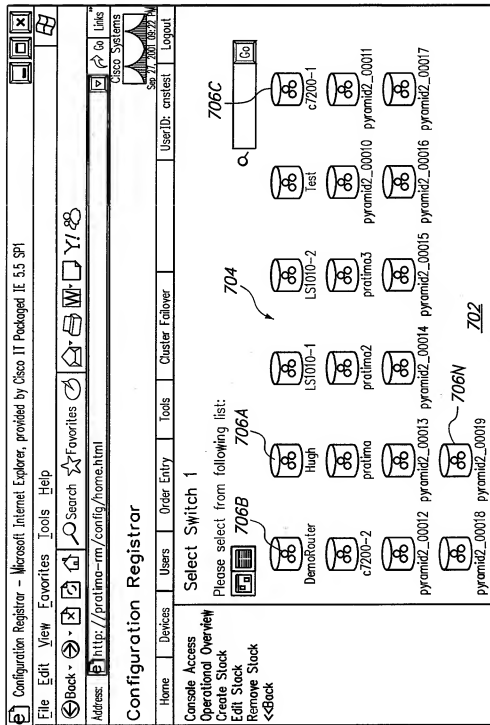


FIG. 7

8/27

FIG. 8

804

9/27

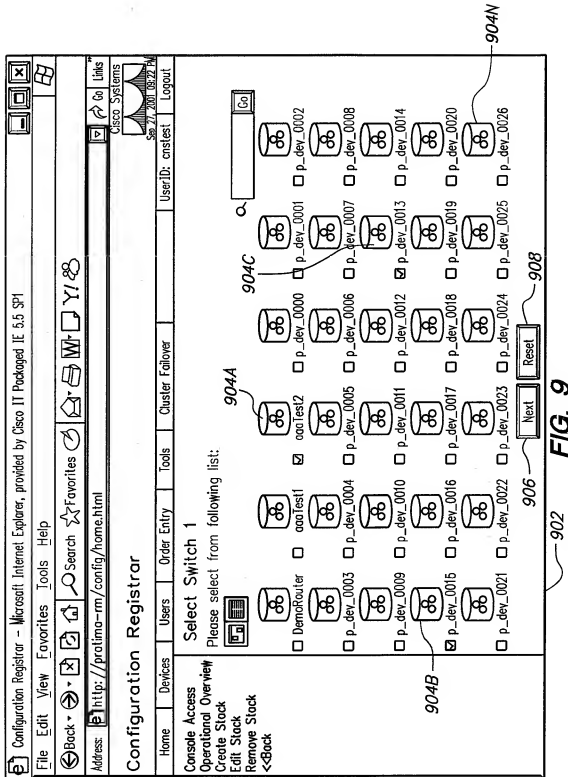


FIG. 9

10/27

1000

Configuration Registrar - Microsoft Internet Explorer, provided by Cisco IT Packaged IE 5.5 SP1

File Edit View Favorites Tools Help

Back Forward Stop Search Favorites Home Print Y!&

Address: http://pratima--rm/config/home.html

Configuration Registrar

Home Devices Users Order Entry Tools Cluster Follower 1004 1002 Cisco Systems Sep 27, 2001 08:27 PM User ID: cnstest Logout

Console Access
Operational Overview
Create Stack
Edit Stack
Remove Stack
<<Back

Add Selected Devices to Stack 1

Template File Name for Configuring Switch 1 (required)	Template File Name for Unconfiguring Switch 1 (required)
Template1.cftgpl	Template2.cftgpl
1006	1012A

Device Name: DemoRouter

Switch1	Switch2
Interface Name:	Interface Name:
Option1:	Option1:
Option2:	Option2:
Option3:	Option3:
1014A	1014B
1016A	1016B
1018	1020
Maximum Number of Connections Allowed	

Telnet Information:


Device Name: Test

Switch1	Switch2
Interface Name:	Interface Name:

1012B

FIG. 10

11/27

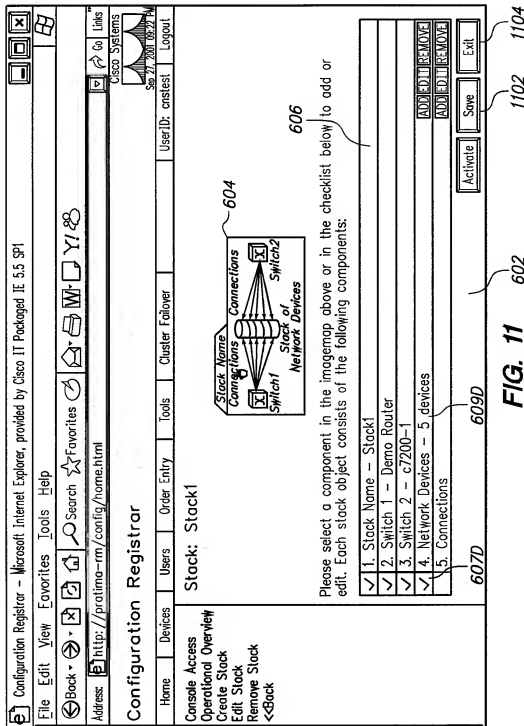

12/27

Configuration Registrar - Microsoft Internet Explorer, provided by Cisco IT Packaged IE 5.5 SP1

File Edit View Favorites Tools Help

Address: http://prattina-rm/config/home.html

Configuration Registrar

Home	Devices	Users	Order Entry	Tools	Cluster Follower	UserID: cnstest	Logout				
<p>Add New Connection to Stack1</p> <table border="1"> <tr> <td> <p>Console Access</p> <p>Operational Overview</p> <p>Create Stack</p> <p>Edit Stack</p> <p>Remove Stack</p> <p><<Back</p> </td> <td> <p>Connection Number: (required)</p> <p>Attribute 1:</p> <p>Attribute 2:</p> <p>Attribute 3:</p> <p>Attribute 4:</p> <p>Method of Connection Provisioning:</p> </td> <td> <p>Template File Name for Configuring Network Device: (required)</p> <p>Template File Name for Unconfiguring Network Device: (required)</p> <p>Template File Name for Configuring Switch 1: (required)</p> <p>Template File Name for Unconfiguring Switch 1: (required)</p> <p>Template File Name for Configuring Switch 2: (required)</p> <p>Template File Name for Unconfiguring Switch 2: (required)</p> </td> <td> <p>1202</p> <p>1204</p> <p>1206</p> <p>1208</p> <p>1210</p> <p>1212</p> <p>1214</p> <p>1216</p> <p>1218</p> <p>1220</p> <p>1222</p> </td> </tr> </table>								<p>Console Access</p> <p>Operational Overview</p> <p>Create Stack</p> <p>Edit Stack</p> <p>Remove Stack</p> <p><<Back</p>	<p>Connection Number: (required)</p> <p>Attribute 1:</p> <p>Attribute 2:</p> <p>Attribute 3:</p> <p>Attribute 4:</p> <p>Method of Connection Provisioning:</p>	<p>Template File Name for Configuring Network Device: (required)</p> <p>Template File Name for Unconfiguring Network Device: (required)</p> <p>Template File Name for Configuring Switch 1: (required)</p> <p>Template File Name for Unconfiguring Switch 1: (required)</p> <p>Template File Name for Configuring Switch 2: (required)</p> <p>Template File Name for Unconfiguring Switch 2: (required)</p>	<p>1202</p> <p>1204</p> <p>1206</p> <p>1208</p> <p>1210</p> <p>1212</p> <p>1214</p> <p>1216</p> <p>1218</p> <p>1220</p> <p>1222</p>
<p>Console Access</p> <p>Operational Overview</p> <p>Create Stack</p> <p>Edit Stack</p> <p>Remove Stack</p> <p><<Back</p>	<p>Connection Number: (required)</p> <p>Attribute 1:</p> <p>Attribute 2:</p> <p>Attribute 3:</p> <p>Attribute 4:</p> <p>Method of Connection Provisioning:</p>	<p>Template File Name for Configuring Network Device: (required)</p> <p>Template File Name for Unconfiguring Network Device: (required)</p> <p>Template File Name for Configuring Switch 1: (required)</p> <p>Template File Name for Unconfiguring Switch 1: (required)</p> <p>Template File Name for Configuring Switch 2: (required)</p> <p>Template File Name for Unconfiguring Switch 2: (required)</p>	<p>1202</p> <p>1204</p> <p>1206</p> <p>1208</p> <p>1210</p> <p>1212</p> <p>1214</p> <p>1216</p> <p>1218</p> <p>1220</p> <p>1222</p>								
<p><input checked="" type="radio"/> Immediate</p> <p><input type="radio"/> Upon PVC Activation</p>		<p>1200</p> <p>1211</p> <p>1224</p> <p>1226</p> <p>1228</p> <p>Ok Add Another Reset</p>									

FIG. 12

13/27

FIG. 13

14/27

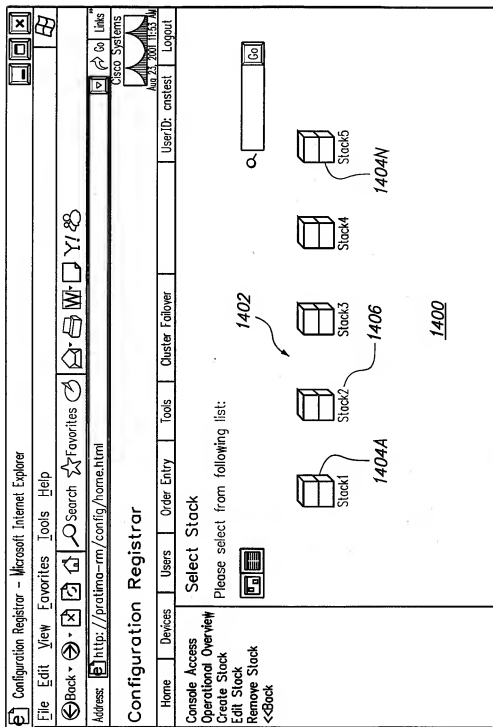


FIG. 14

15/27

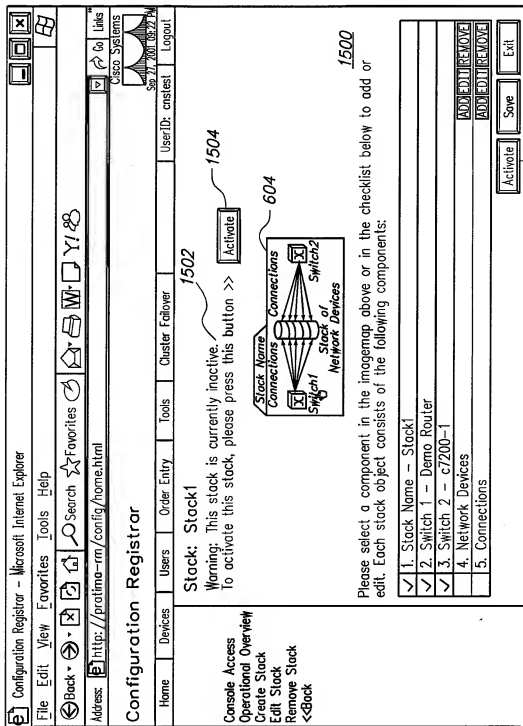


FIG. 15

16/27

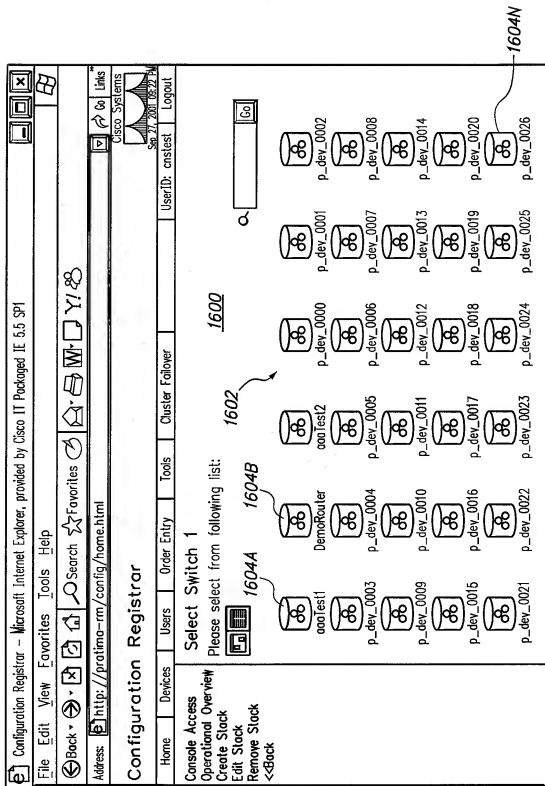


FIG. 16

17/27

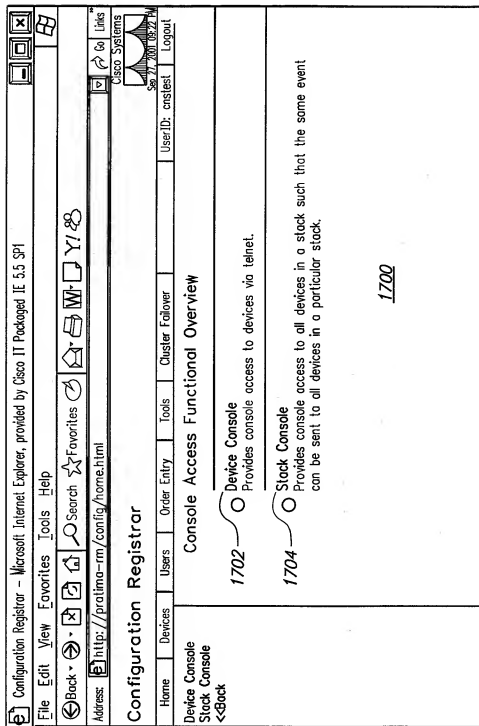


FIG. 17

18/27

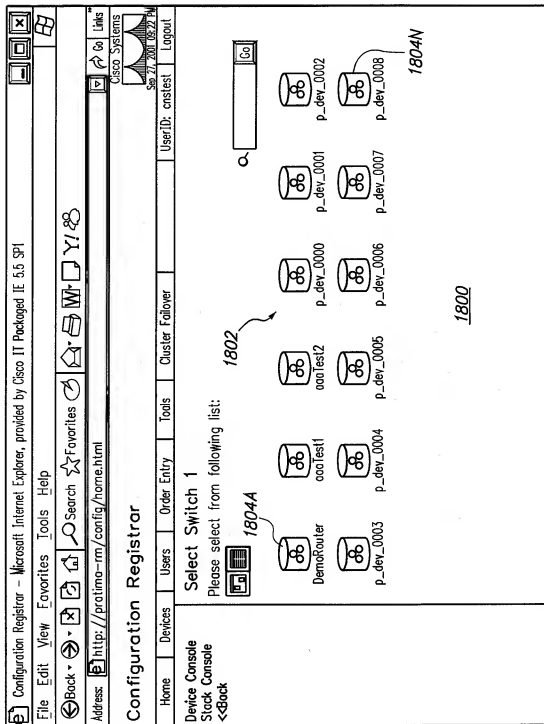


FIG. 18

19/27

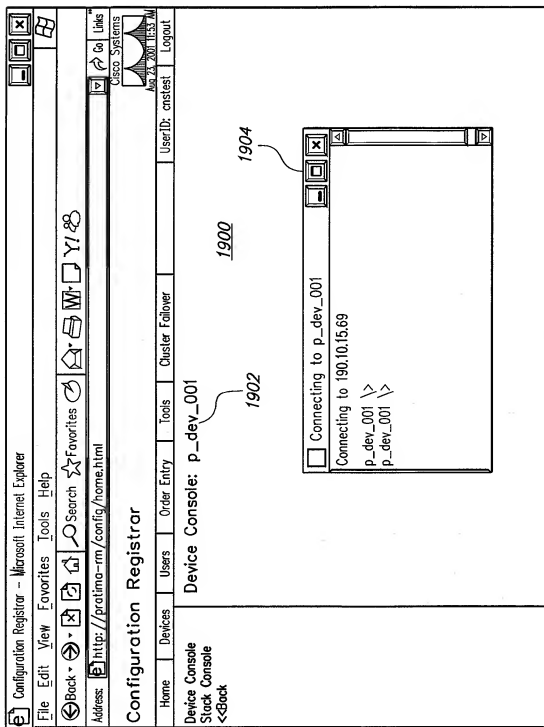


FIG. 19

20/27

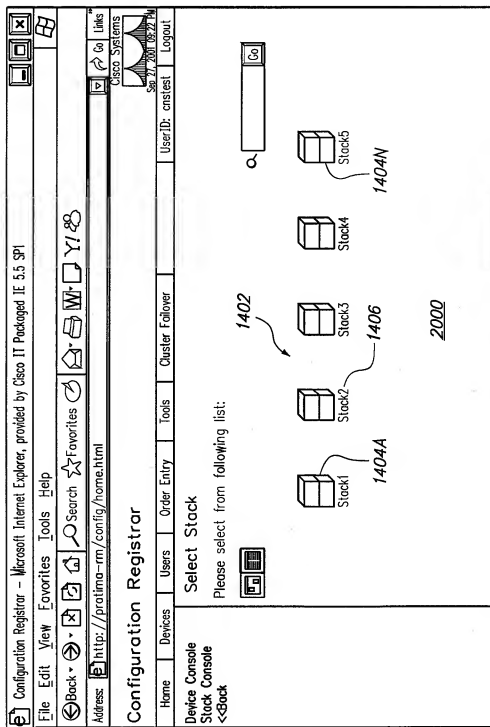


FIG. 20

21/27

Configuration Registrar - Microsoft Internet Explorer, provided by Cisco IT Packaged IE 5.5 SP1
File Edit View Favorites Tools Help
Back Forward Stop Search Favorites Home Workspaces Y!8
Address: http://pratlina-rm/config/home.html
Cisco Systems
Sun 7/18/01 08:27 PM
Links
Cisco Systems

Cisco Systems
Sun 7/18/01 08:27 PM
Links
Cisco Systems

Home Devices Users Order Entry Tools Cluster Follower User ID: cnstest Logout

Console Access to Stack: Stack2 2112 Switch View of
Allows you to send the same command to all the device on this stack.
Event Log
2102A Event Log 2102 Go

Date/Time	Type	Subject name	Message
7/18/01 3:33:35 PM	other	cisco.cns.config.cslog	n/a
7/18/01 3:33:35 PM	other	cisco.cns.config.cslog	n/a
7/18/01 3:33:35 PM	other	cisco.cns.config.cslog	n/a
7/18/01 3:37:11 PM	other	cisco.cns.config.cslog	n/a
7/18/01 3:37:11 PM	other	cisco.cns.config.cslog	n/a
7/18/01 3:37:11 PM	other	cisco.cns.config.cslog	n/a

2102N 2104 2106 2100 2108 2110
2114 2116
Subjects Reload
Command: Send 2116

FIG. 21

22/27


Configuration Registrar - Microsoft Internet Explorer, provided by Cisco IT Packaged IE 5.5 SP1 File Edit View Favorites Tools Help									
Back Search Favorites									
Address: http://protimo-rm/config/home.html									
Configuration Registrar									
Home	Devices	Users	Order Entry	Tools	Cluster Follower	2112	Switch View of	UserID: anstest	Logout
Device Console Stack Console <<Back									
Console Access to Stack: Stack2 Allows you to send the same command to all the device on this stack. Execution log 9/19/01 11:54:45 PM - cisco.cns.exec.cmd.c7200-2 show running 9/19/01 11:54:45 PM - cisco.cns.exec.rsp.c7200-2 Building configuration... Current configuration : 1296 bytes ! version 12.2 service timestamps debug uptime service timestamps log uptime no service password-encryption service udp-small-servers service tcp-small-servers ! hostname c7200-2 ! enable password cisco ! ip subnet-zero !									
Command: 2116									

FIG. 22

23/27

FIG. 23

24/27

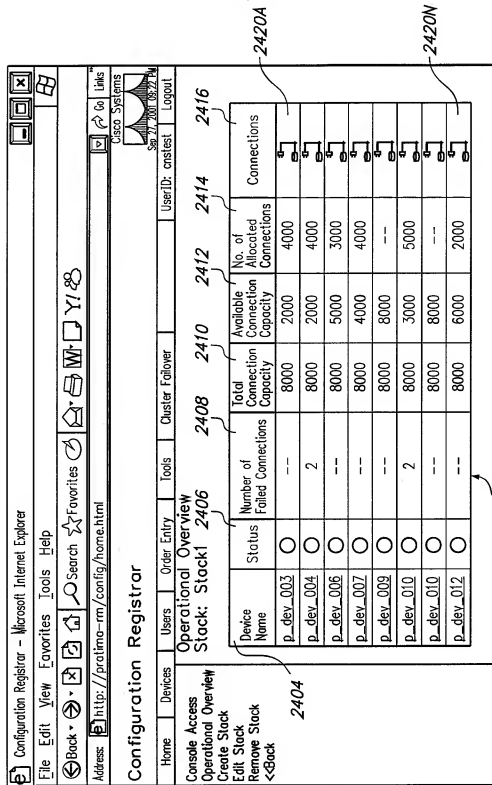

25/27

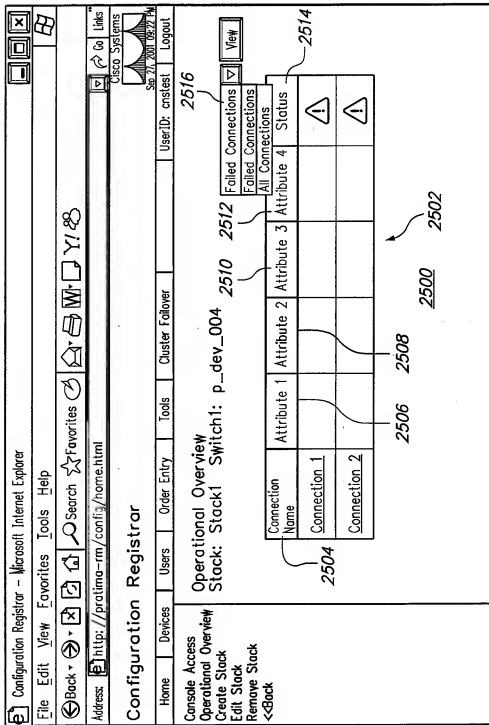


FIG. 25

26/27

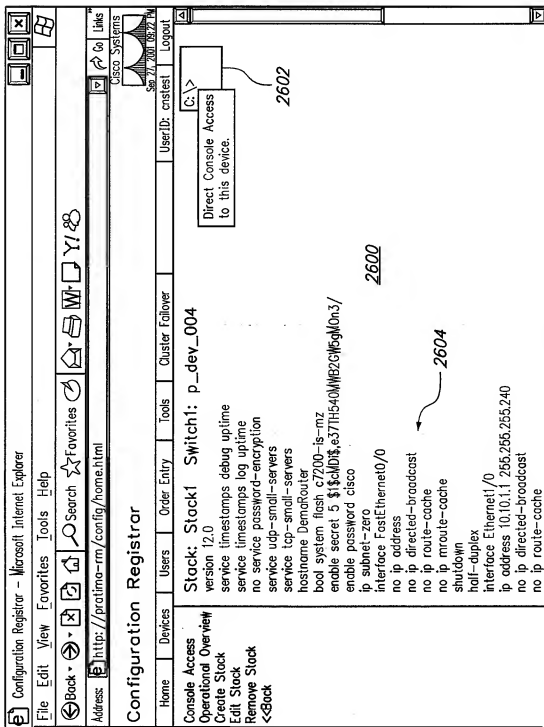


FIG. 27

